

: 1000pcs 10000pcs

(10000pcs 1000) 1000pcs 10000pcs : 10000pcs 1000 1
260 : 1000 10000 : 10000pcs 10000pcs 2MM 200 : 10000MM 100 : 10000MM .1000pcs / 10000
1000 1000 5-3 10000 : 10000pcs 10000pcs 3
10000 100 10000 10000 10000 4 CE UL ROHS
5 reponse 100000000 10000000

1000

10000 10000000 10000000 10000000 10000000 10000 10000 10000000 10000 10000 10000 10000000 10000000
3 10000 10000 10000 10000 .1000 10000 5.08 5.0 3.81 3.5 10000000 .1000P 2P. 1000 1000000000
1000000000 1000000000 1000000000 1000000000 1000000000 1000000000 .10000 10000000 10000000
10000000

Technical Parameters for Screw Terminal Block/Connector :		
Electrical Specification	Mechanical Specification	Part & Material
Rated: 300V,10A	Temp.Range: -40C- +105 C	Body: PA66,UL94V-0
Contact resistance: 20mΩ Max	Max Soldering: +250 C,5s	Screw: Steel,Zn plating
Insulation resistance: 5000MΩ Min	Wire range: 22-14AWG(2.5MM2)	Wire Protector: Bronze,Ni plating
Dielectric strength : 2000VAC min/60 seconds	Strip Length: 4.5 -5mm	Terminal: Brass,Tin plating

SZOMK

RoHS

c  US





CQC



2EOMJC-5.08

3 g

SZOMK


RoHS

c  US



CE

CQC

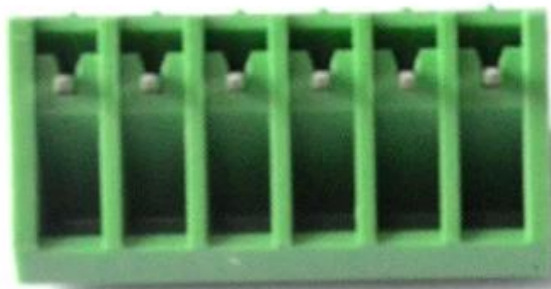


SZOMK

RoHS



CQC

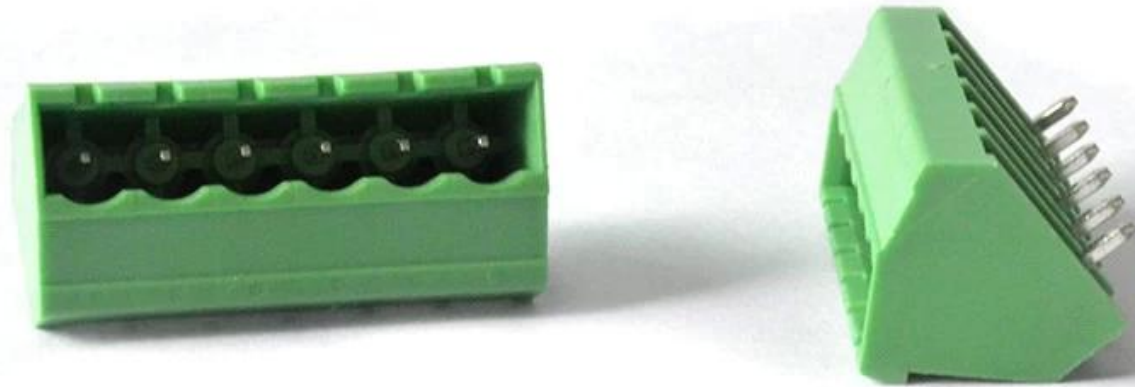


SZOMK

RoHS

c  US



CQC

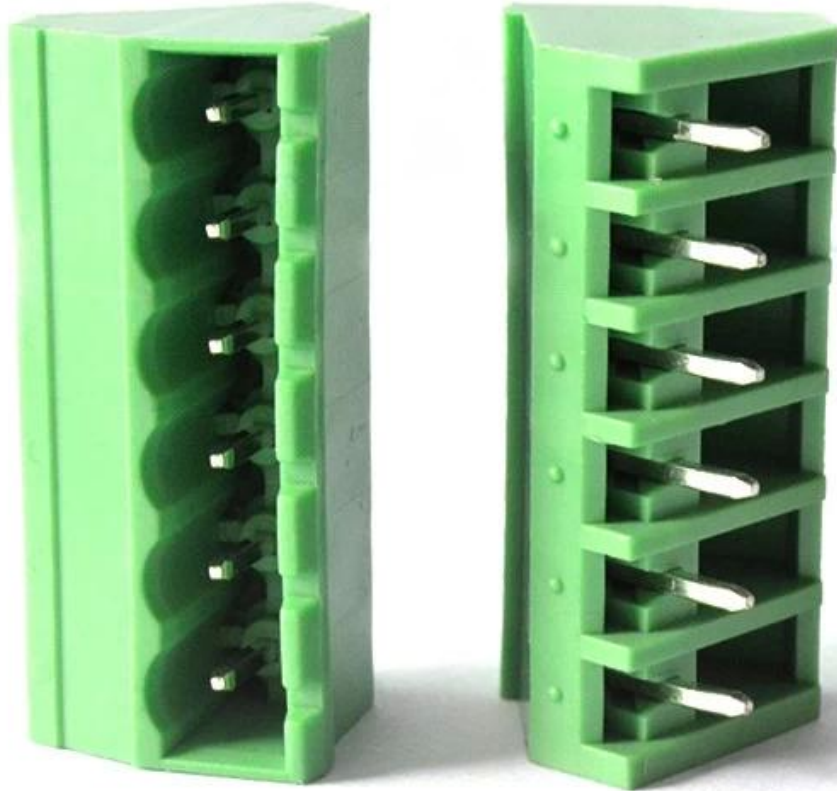



QQ

2819022460



Tel

86-755-83222882
86-13418600500



Add

628Room,505 Building ,Shangbu industry,
Hangtian road ,Futian district ,Shenzhen,
China,518031



Email

hellen@szomk.com.cn



skype

szomk-002

