

●■■■■■ ■■■■■■

(□□□□□ □□) □□□□ □□□□□□□ □□□□ : □□□□□ □□□ 1

260 : 単位 単位 : 単位単位単位単位単位単位単位 2MM 200 : 単位単位MM 100 : 単位単位MM .1000pcs / 単位単位

□□□ □□□ □□□□ 5-3 □□□□ :□□□□□□□ □□□□□□ 3

□□□□ □□ □□□□ □□□□ □□ □□□□□□ 4 CE □ UL □ ROHS

5 response □□□□□□□□ □□□□□□

11

[illegible]

Technical Parameters for Screw Terminal Block/Connector :

Electrical Specification	Mechanical Specification	Part & Material
Rated: 300V,16A	Temp.Range: -40C- +105 C	Body: PA66,UL94V-0
Contact resistance: 20mΩ Max	Max Soldering: +250 C,5s	Screw: Steel,Zn plating
Insulation resistance: 5000MΩ Min	Wire range: 22-14AWG(2.5MM2)	Wire Protector: Bronze,Ni plating
Dielectric strength : 2000VAC min/60 seconds	Strip Length: 4.5 -5mm	Terminal: Brass,Tin plating


SZOMK

RoHS

c **UL** US



CQC

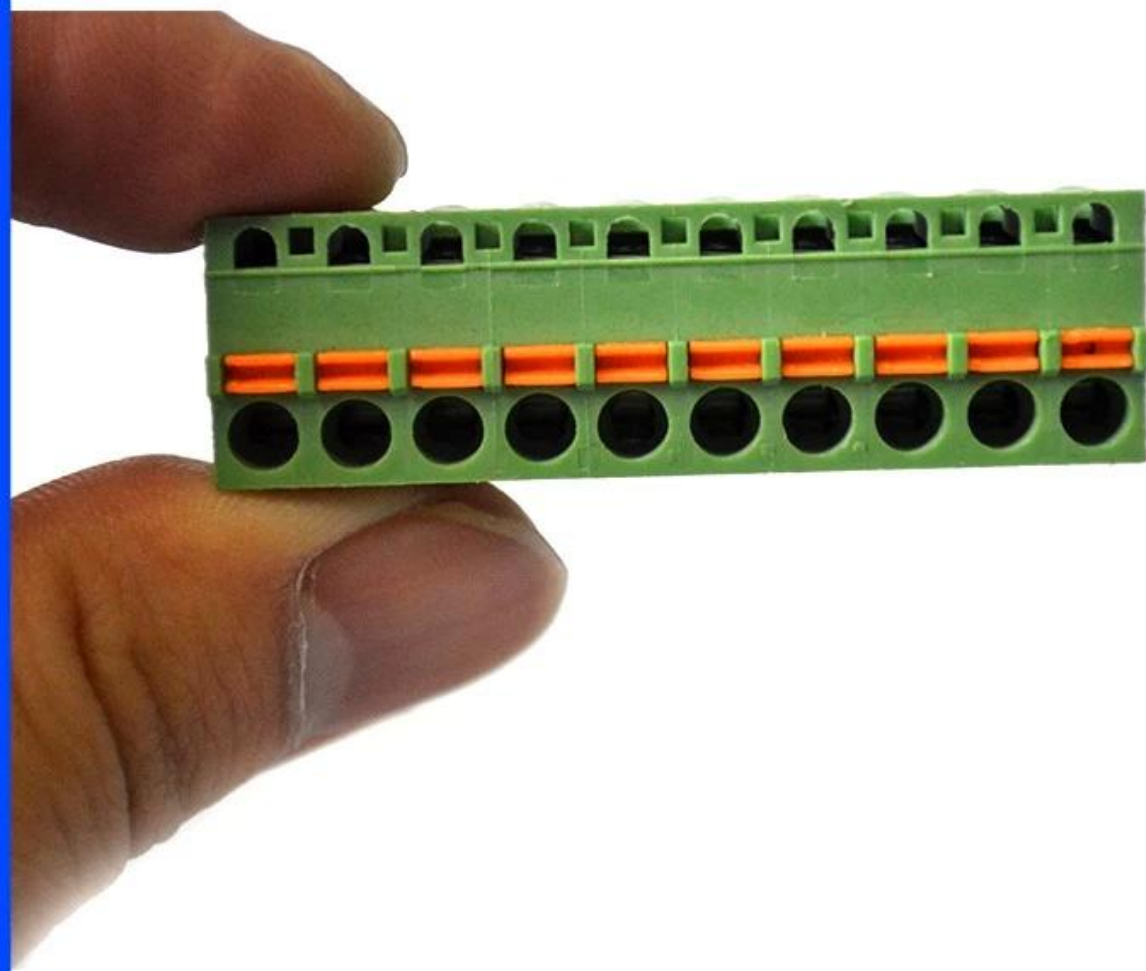


SZOMK

RoHS

C  US



CQC

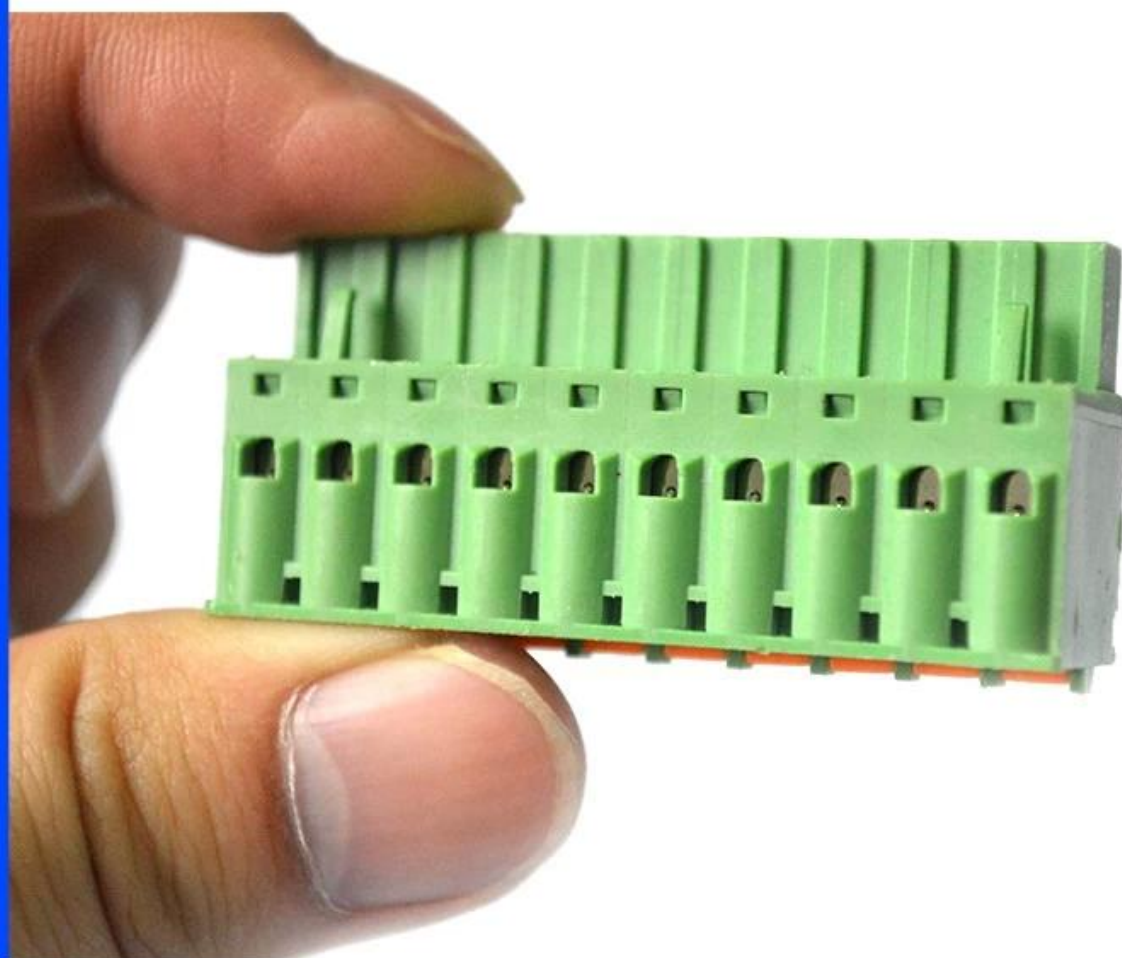


SZOMK

RoHS

c **UL** US



CQC

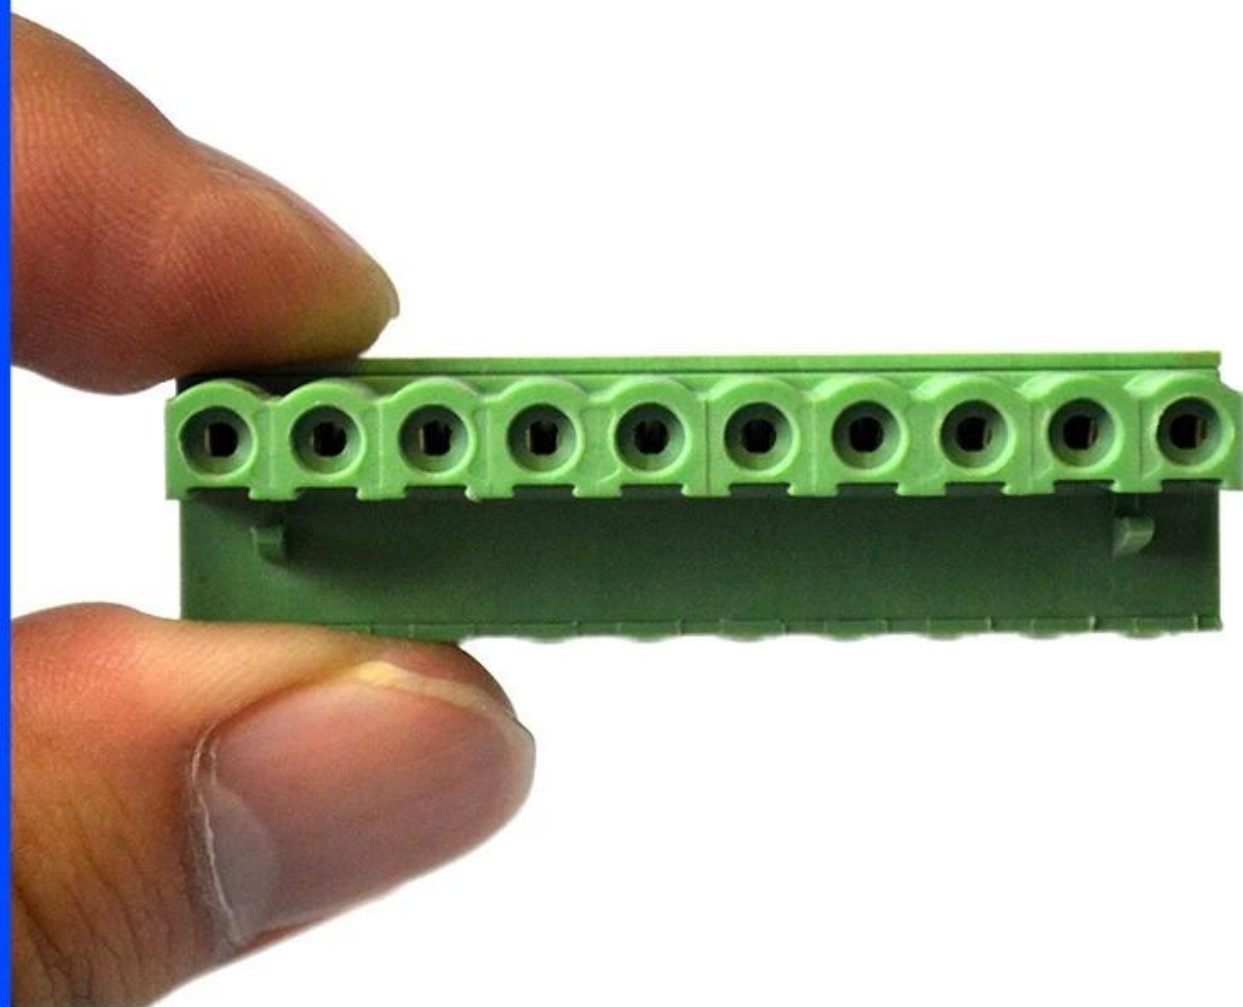

SZOMK

RoHS

c **UL** US



CQC



Male
2EOMKD-5.08
2g/Pin

SZOMK

RoHS

c **UL** US



CQC



SZOMK


RoHS

C  US



CE

CQC

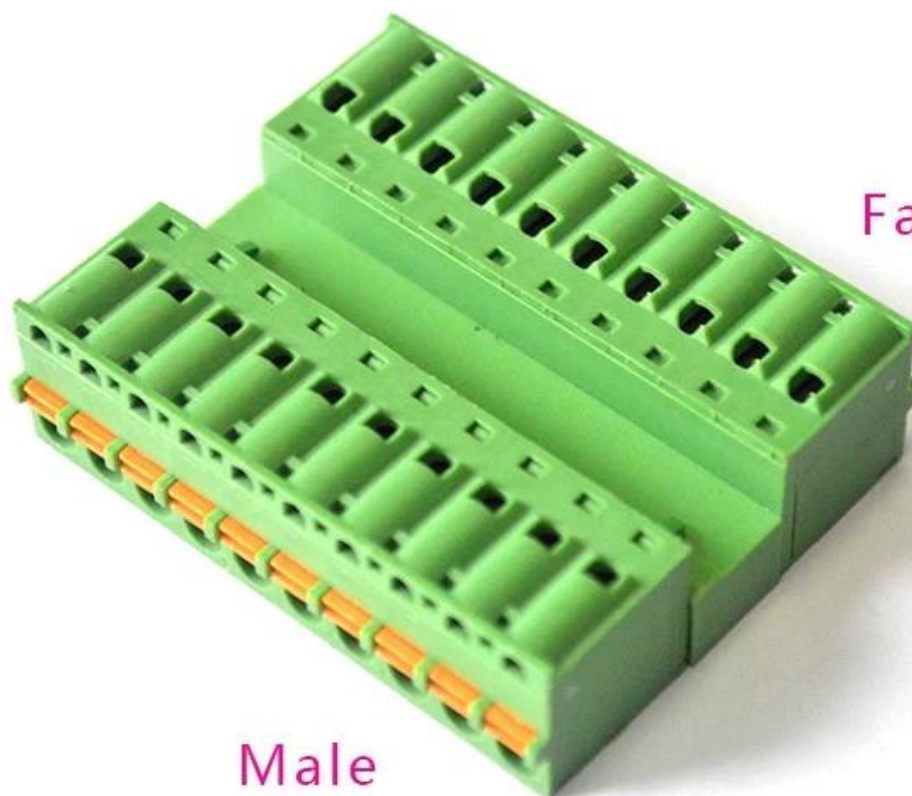



QQ

2819022460



Tel

86-755-83222882
86-13418600500



Add

628Room,505 Building ,Shangbu industry,
Hangtian road ,Futian district ,Shenzhen,
China,518031



Email

hellen@szomk.com.cn



skype

szomk-002