

□□ □□ □□ :

□□□ □ □□ : Zhejiang, □□ (□□)

□ □□ □□ □□ : □□ □□ : 260mm, □ : 200mm □□ : 100mm .1000pcs / □□

3 □□ □□ □□ : □□□□□ 3~5□ □□ □

CE, UL, ROHS□ □□□ 4 □□ □□□ □□

□□ 5 □□□□ □□□□

□□

PCB □□□□ □□ □□□ □ □□ □□□ □□ □□ □□□□□ □□ □□□ □□□□□□. □□□ 3.5, 3.81, 5.0, 5.08 □□□. □□□ 3P□ 2P□ □□ □ □□□. □□□□□□ □□□ □□□□. □□ □□□ □□, □□, □□ □ □□ □□□□□□

Technical Parameters for Screw Terminal Block/Connector :		
Electrical Specification	Mechanical Specification	Part & Material
Rated: 300V,16A	Temp.Range: -40C-+105 C	Body: PA66,UL94V-0
Contact resistance: 20mΩ Max	Max Soldering: +250 C,5s	Screw: Steel,Zn plating
Insulation resistance: 5000MΩ Min	Wire range: 22-14AWG(2.5MM2)	Wire Protector: Bronze,Ni plating
Dielectric strength : 2000VAC min/60 seconds	Strip Length: 4.5 -5mm	Terminal: Brass,Tin plating


SZOMK

RoHS

c  US



CQC

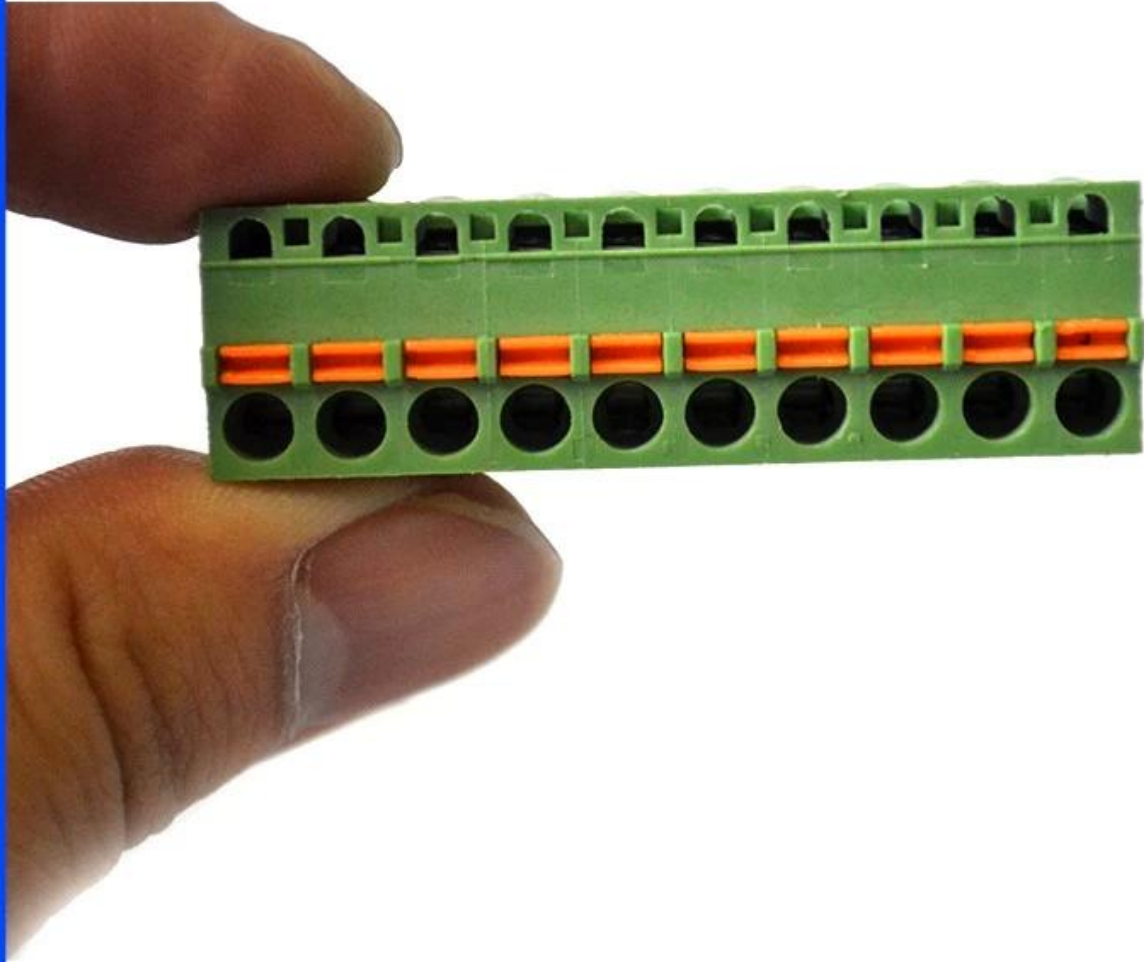


SZOMK

RoHS

c  US



CQC

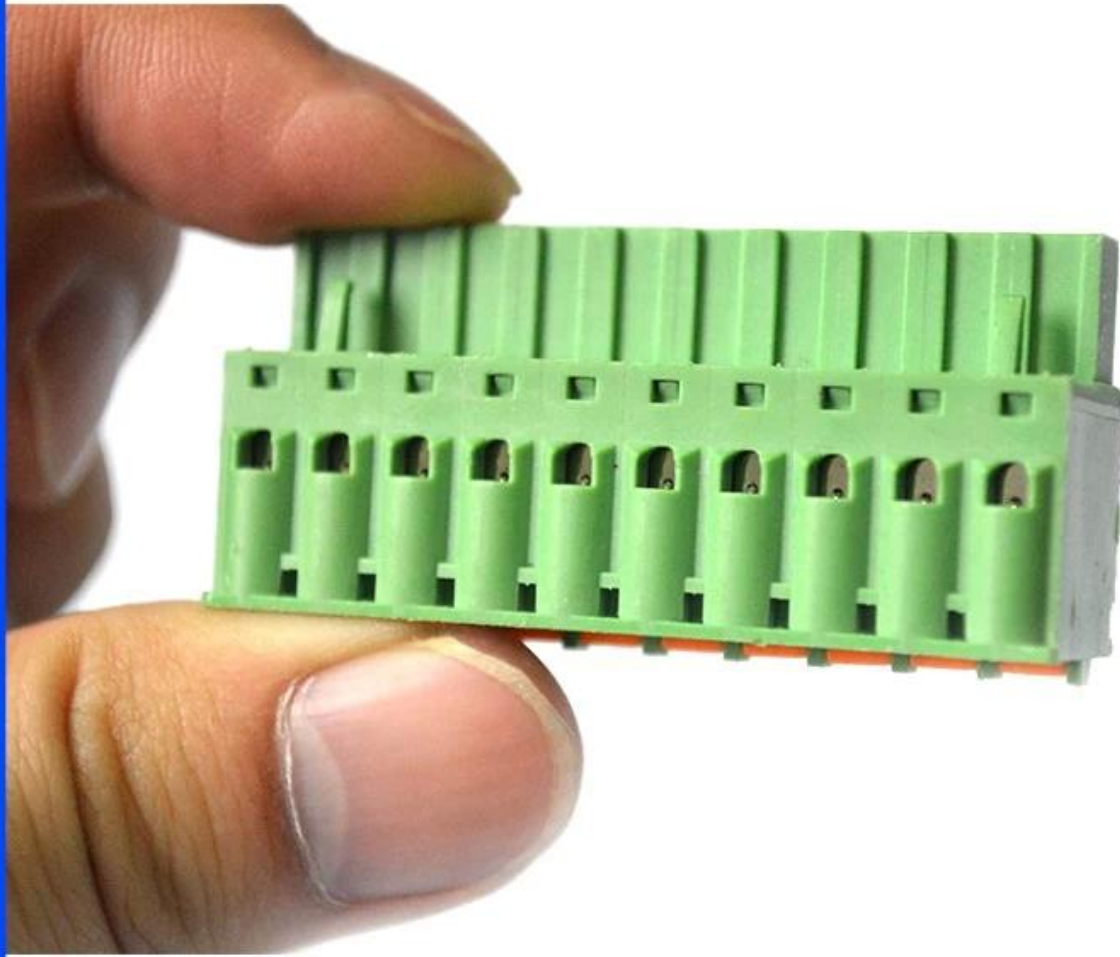

SZOMK


RoHS

c  US



CE

CQC

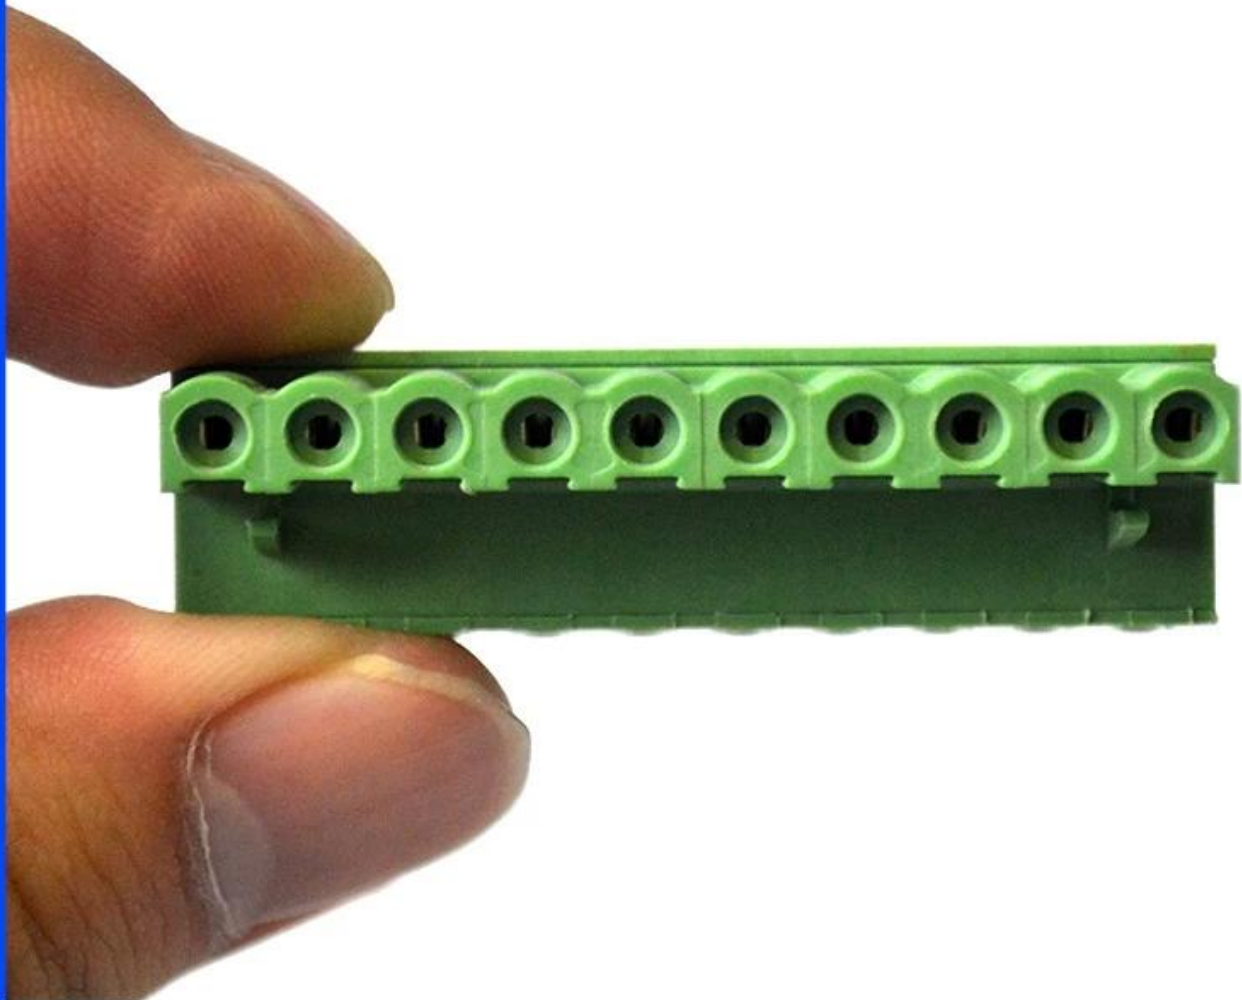

SZOMK

RoHS c  US   CQC



Male
2EOMKD-5.08
2g/Pin

SZOMK

RoHS

c  US



CE

CQC



SZOMK


RoHS

c  US



CE

CQC

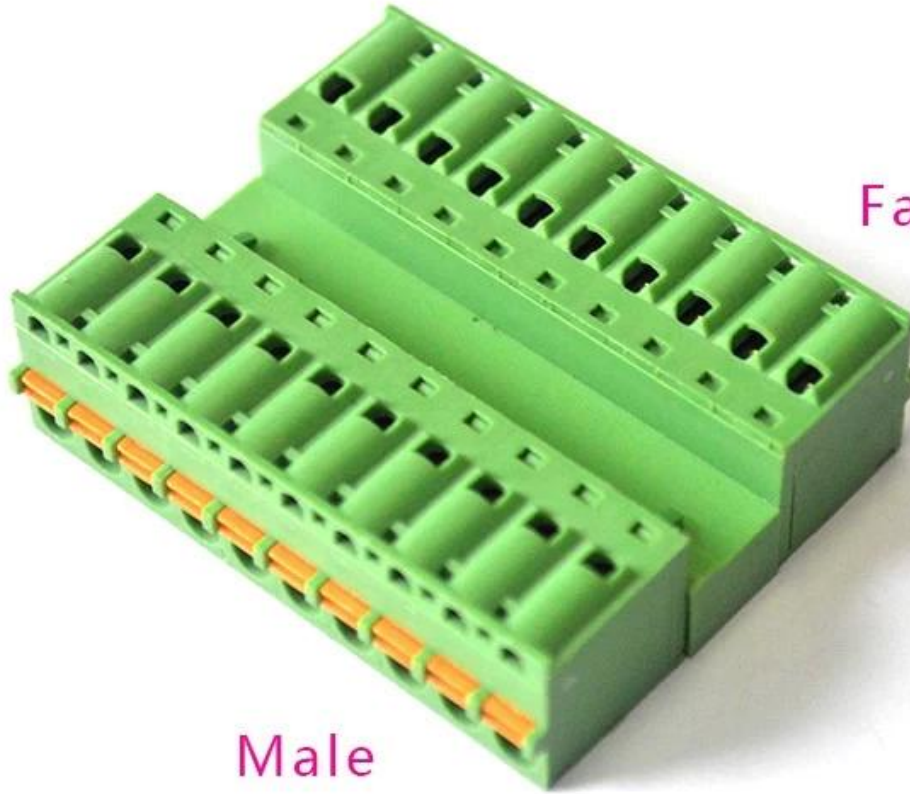

Female

Male



QQ

2819022460



Tel

86-755-83222882
86-13418600500



Add

628Room,505 Building ,Shangbu industry,
Hangtian road ,Futian district ,Shenzhen,
China,518031



Email

hellen@szomk.com.cn



skype

szomk-002